


50 V /100 V combined transformer:

Primary connection:  
 5 (White) : 6 (Green) 50 V  
 5 (White) : 8 (Red) 100 V

Secondary nominal tapings:

1 : 4 6,0 W  
 1 : 3 3,0 W  
 2 : 4 2,0 W  
 1 : 2 1,5 W  
 3 : 4 0,8 W  
 2 : 3 0,5 W

1W/1m Pink Noise 1/3 octave bands

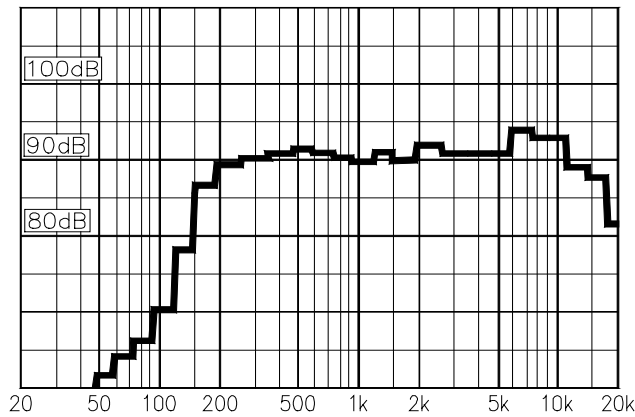

Material / Colour..... Particle board / White or walnut  
 Mounting ..... Screws, keyhole  
 Termination ..... Spring clamp  
 Weight ..... 1,2 kg  
 IP-rating .....  
 Max. / min. amb. temp ..... 90°C / -40°C  
 Standard version ..... 100 V / 50 V transformer  
 Rated / max. power ..... 6 W / 8 W  
 SPL 1W/1m..... 90 dB  
 SPL rated power ..... 97 dB  
 Effective freq. range ..... 140 – 20000 Hz  
 Dispersion (-6dB) 1kHz / 4kHz ..... 140° / 80°  
 Directivity factor, Q.....

## Installation, Operation and Maintenance Procedures

- Screw the bracket on the wall, and fasten the cabinet to the bracket with one screw.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Take care when the loudspeaker is energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

