


MD-60 is available with transformer on request:

100/70/50 Volt line

Secondary switch tapings:

1/1	60,0 W
1/2	30,0 W
1/4	15,0 W
1/8	7,5 W
1/16	3,5 W

1W/1m Pink Noise 1/3 octave bands

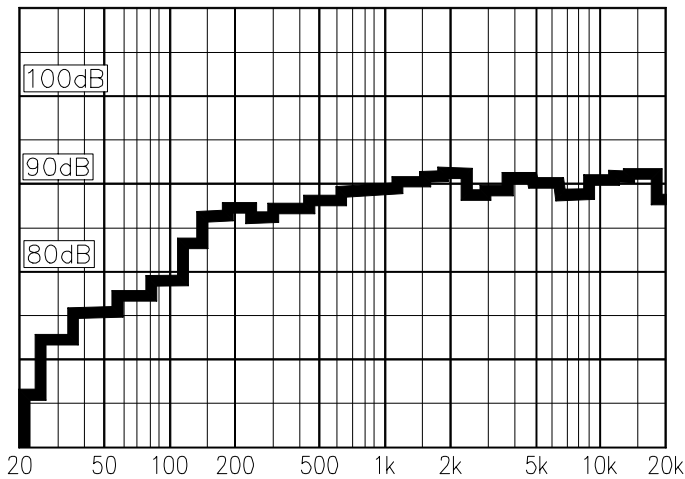

Material / Colour..... ABS / Black or White
 Mounting Bracket
 Termination Screw terminal
 Weight 2,9 kg
 IP-rating
 Max. / min. amb. temp 90°C / -20°C
 Standard version 8Ω
 Power..... 60 W - 100 W
 SPL 1W/1m..... 90 dB
 SPL 100 W 109 dB
 Effective freq. range 45 – 20000 Hz
 Dispersion (-6dB) 1kHz / 4kHz 110° / 55°
 Directivity factor, Q..... 6,4

Installation, Operation and Maintenance Procedures

- MD-60 is available with 60 W transformer, and optional brackets.
- Screw bracket to wall or ceiling with screws, place cabinet onto ball socket and tighten bolt.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated on the label.
- Do not open when loudspeaker is energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

