


Rec. ceiling hole: \varnothing 170 mm

Transformer:
 Combined
 50 / 100 Volt line
 5(White) : 6(Green) 50V
 5(White) : 8(Red) 100V

Secondary nominal
 tapings:
 1 : 4 6,0 W
 1 : 3 3,0 W
 2 : 4 2,0 W
 1 : 2 1,5 W
 3 : 4 0,9 W
 2 : 3 0,5 W

1W/1m Pink Noise 1/3 octave bands

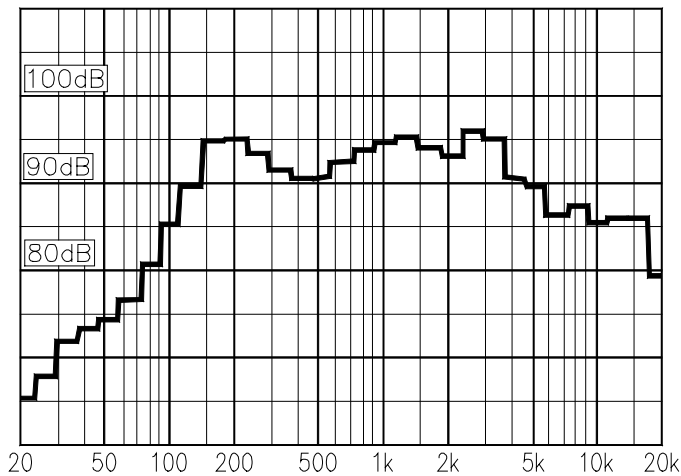

Material / Colour.....Aluminium / RAL 9010
 Mounting 4 Screws
 Termination Spring clamp
 Weight 0,9 kg
 IP-rating.....
 Max. / min. amb. temp 90°C / -20°C
 Standard version 50 / 100 V transformer
 Rated / max. power 6 W / 15 W
 SPL 1W/1m.....92 dB
 SPL rated power.....99 dB
 Effective freq. range 90 – 20000 Hz
 Dispersion (-6dB) 1kHz / 4kHz..... 130° / 60°
 Directivity factor, Q.....

Installation, Operation and Maintenance Procedures

- Connect cable to terminal. Install loudspeaker grill by screws.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Take care when loudspeaker is energized (100 V).
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

