


Transformer:  
 Combined  
 50/100 Volt line  
 5(White) : 6(Green) 50V  
 5(White) : 8(Red) 100V

Secondary nominal  
 tapings:  
 1 : 4 6,0W  
 1 : 3 3,0W  
 2 : 4 2,0W  
 1 : 2 1,5W  
 3 : 4 0,9 W  
 2 : 3 0,5 W

Rec. ceiling hole:  $\varnothing$  180 mm

1W/1m Pink Noise 1/3 octave bands

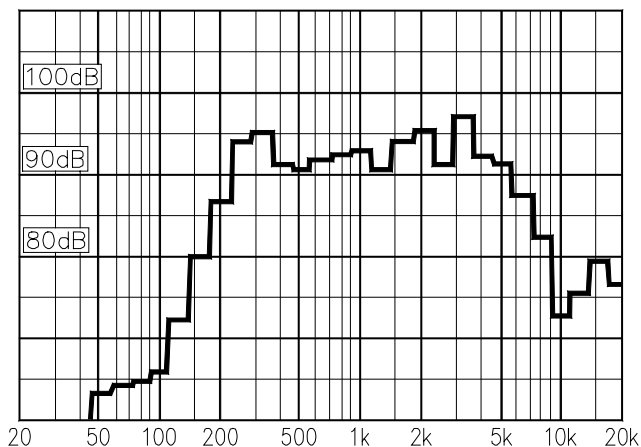

Material / Colour..... Aluminium / RAL9010  
 Mounting ..... 4 screws  
 Termination ..... Spring clamps  
 Weight ..... 1,1 kg  
 IP-rating ..... 42  
 Max. / min. amb. temp ..... 90°C / -20°C  
 Standard version ..... 50 / 100 V transformer  
 Rated / max. power ..... 6 W / 15 W  
 SPL 1W/1m..... 90 dB  
 SPL rated power ..... 97 dB  
 Effective freq. range ..... 150 – 15000 Hz  
 Dispersion (-6dB) 1kHz / 4kHz ..... 130° / 60°  
 Directivity factor, Q.....

## Installation, Operation and Maintenance Procedures

- Lead the cable trough cable inlet in to alu-box and connect to terminal.
- Screw box to loudspeaker grill and install loudspeaker by four screws.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

