

Transformer:
100 Volt line


Primary nominal
tappings:

1 : 2	30,0W
2 : 3	15,5W
3 : 4	7,5W
1 : 3	5,5W
2 : 4	2,7W
1 : 4	2,0W

1 = Red, 2 = Yellow,
3 = Green, 4 = Blue

Black : White 8 ohm

1W/1m Pink Noise 1/3 octave bands

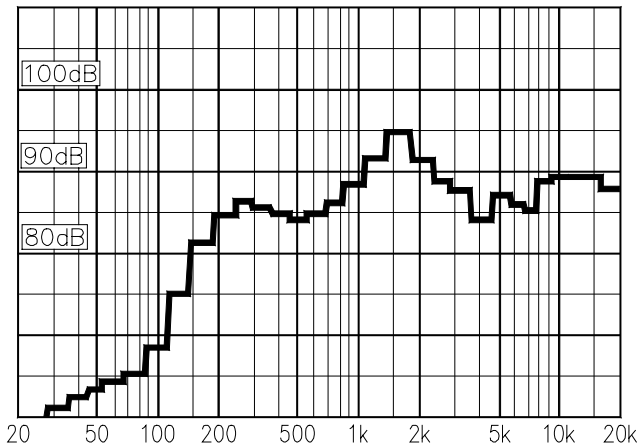

Material / Colour..... Polyamid / Black or white (RAL 7035)
 MountingBy cable as pendant / Bracket / Swivel bracket
 Termination Cable, 2m
 Weight 2,5 kg
 IP-rating 54
 Max. / min. amb. temp 90°C / -20°C
 Standard version 100 V transformer / 8 Ω
 Rated / max. power 30 W / 50 W
 SPL 1W/1m..... 87 dB
 SPL rated power 102 dB
 Effective freq. range 95 – 20000 Hz
 Dispersion (-6dB) 1kHz / 4kHz 120° / 100°
 Directivity factor, Q.....

Installation, Operation and Maintenance Procedures

- How to mount the loudspeaker:
 - Lamp-version (L): Ensure that the cable is fastened securely to the ceiling.
 - Bracket-version (LB): Screw the bracket to wall or ceiling with screws.
 - Swivel bracket version (LS): Read mounting instructions on carton box.
- To change the position of the loudspeaker:
 - Bracket version (LB): Adjust the bracket (by loosening / tightening the screws) as required.
 - Swivel bracket version (LS): Adjust the swivel base (by loosening / tightening the screws) as required.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Take care when loudspeaker is energized (100V).
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

