


50 V / 100 V combined transformer:

Primary connection:  
 5 (White) : 6 (Green) 50V  
 5 (White) : 8 (Red) 100 V

Secondary nominal tapings:

1 : 4 10,0 W  
 1 : 3 5,0 W  
 2 : 4 3,5 W  
 1 : 2 2,5 W  
 3 : 4 1,5 W  
 2 : 3 0,8 W

1W/1m Pink Noise 1/3 octave bands

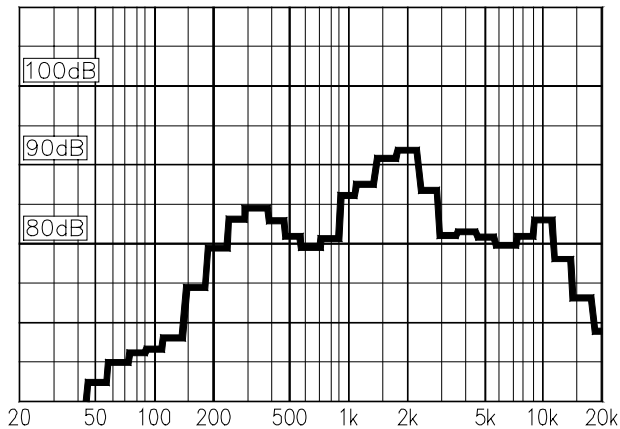

Material / Colour ..... ABS / RAL 9010  
 Mounting ..... 4 screws  
 Termination ..... Inside screw terminal  
 Weight ..... 0,8 kg  
 IP-rating ..... 44  
 Max. / min. amb. temp ..... 130°C / -40°C  
 Standard version ..... 100 V / 50 V transformer  
 Rated / max. power ..... 10 W / 15 W  
 SPL 1W/1m ..... 85 dB  
 SPL rated power ..... 95 dB  
 Effective freq. range ..... 150 – 20000 Hz  
 Dispersion (-6dB) 1kHz / 4kHz ..... 140° / 100°  
 Directivity factor, Q.....

## Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- To open the cabinet, press the clip on the short end of the cabinet, and lift the cabinet from the mounting plate. Fasten the mounting plate to wall or ceiling by 4 screws, and clip on the front cover.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- The loudspeaker is equipped with four alternative cable entry ports.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

