


Transformer:
 Combined
 50 / 100 Volt line
 5(White) : 6(Green) 50V
 5(White) : 8(Red) 100V

Secondary nominal
 tapings:
 1 : 4 6,0W
 1 : 3 3,0W
 2 : 4 2,0W
 1 : 2 1,5W
 3 : 4 0,9 W
 2 : 3 0,5 W

Rec. ceiling hole: \varnothing 214 mm

1W/1m Pink Noise 1/3 octave bands

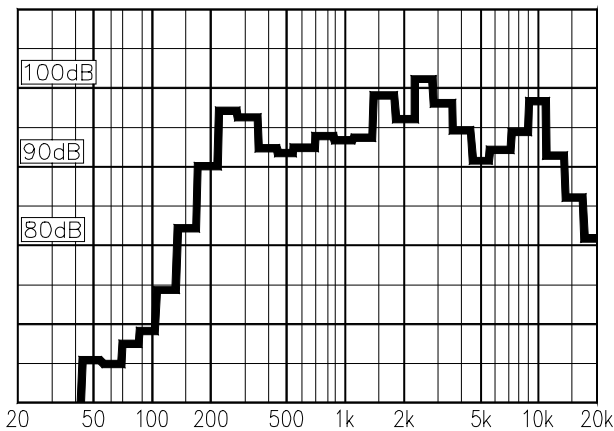

Material / Colour..... Aluminium / RAL9010
 Mounting 4 metal strips
 Termination Spring clamps
 Weight 1,4 kg
 IP-rating 42
 Max. / min. amb. temp 90°C / -20°C
 Standard version 50 / 100 V transformer
 Rated / max. power 6 W / 20 W
 SPL 1W/1m 93 dB
 SPL rated power 100 dB
 Effective freq. range 150 – 20000 Hz
 Dispersion (-6dB) 1kHz / 4kHz 140° / 50°
 Directivity factor, Q.....

Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- Install outer ring into the hole by bending down 4 metal strips. Use nail / screw to prevent the ring from turning. Lead cable through cable inlet in to box and connect to terminal. Screw box to loudspeaker grill. Turn the loudspeaker grill clockwise into fixed position.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

