


Transformer:
 Combined
 50 / 100 Volt line
 5(White) : 6(Green) 50V
 5(White) : 8(Red) 100V

Secondary nominal
 tapings:
 1 : 4 6,0W
 1 : 3 3,0W
 2 : 4 2,0W
 1 : 2 1,5W
 3 : 4 0,9 W
 2 : 3 0,5 W

Rec. ceiling hole: $\varnothing 182 - \varnothing 195 \text{ mm}$

1W/1m Pink Noise 1/3 octave bands

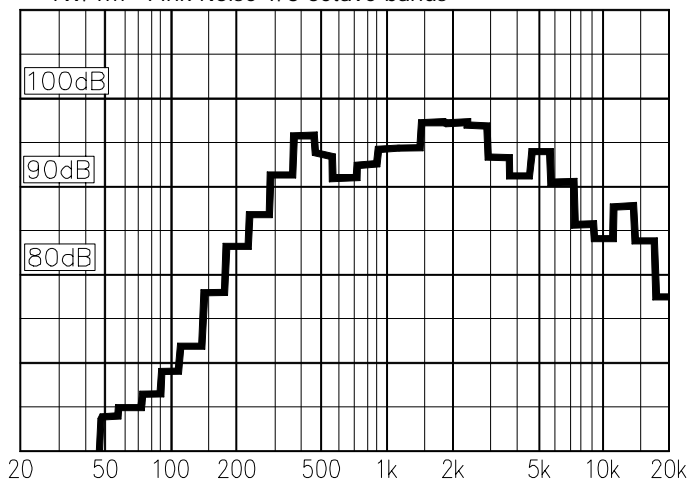

Material / Colour..... ABS grille, Polystyrene box / White
 Mounting 3 screws
 Termination Spring clamps
 Weight 1,2 kg
 IP-rating 42
 Max. / min. amb. temp 90°C / -20°C
 Standard version 50 / 100 V transformer
 Rated / max. power 6 W / 15 W
 SPL 1W/1m..... 90 dB
 SPL rated power 97 dB
 Effective freq. range 140 – 18000 Hz
 Dispersion (-6dB) 1kHz / 4kHz 130° / 50°
 Directivity factor, Q.....

Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- Install box by turning 3 screws clockwise and the 3 hooks will keep loudspeaker in position. Connect cable to terminal and screw loudspeaker grill clockwise into fixed position.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

