


Transformer:  
100 Volt line  
White : Black 100V

Secondary nominal  
tappings:

common : 4 6,0W  
common : 3 3,0W  
common : 2 1,5W

Rec. ceiling hole:  $\varnothing 139 - 142$  mm

1W/1m Pink Noise 1/3 octave bands

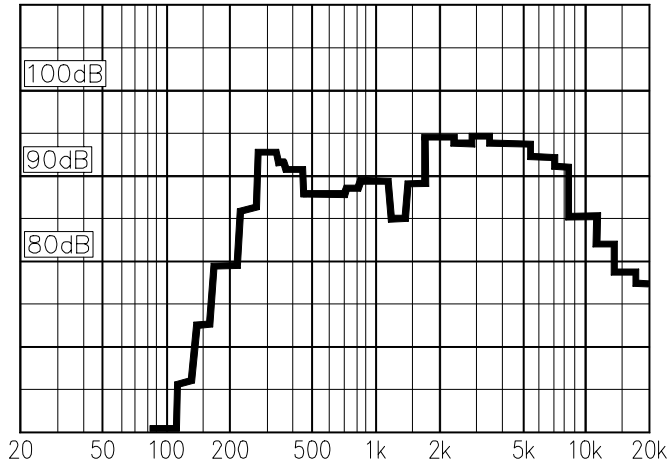

Material / Colour.....Aluminium / RAL9010  
Mounting ..... Springs  
Termination ..... Spring clamps  
Weight ..... 0,6 kg  
IP-rating ..... 42  
Max. / min. amb. temp ..... 90°C / -20°C  
Standard version ..... 50 / 100 V transformer  
Rated / max. power ..... 6 W  
SPL 1W/1m..... 90 dB  
SPL rated power ..... 97 dB  
Effective freq. range ..... 180 – 15000 Hz  
Dispersion (-6dB) 1kHz / 4kHz ..... 170° / 60°  
Directivity factor, Q.....

### Installation, Operation and Maintenance Procedures

- Lead cable through cable inlet in to box and connect to terminal.
- Install box by 1 screw to loudspeaker and mount the complete loudspeaker by bending back 2 springs.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.



DNH reserves the right to alter specifications without notice.

Rev. 06.11.2002