

Transformer:
100 Volt line


White : Black 100V

Secondary nominal
tappings:

common : 4	6,0 W
common : 3	3,0 W
common : 2	1,5 W

Rec. ceiling hole: $\varnothing 141 - \varnothing 143$ mm

1W/1m Pink Noise 1/3 octave bands

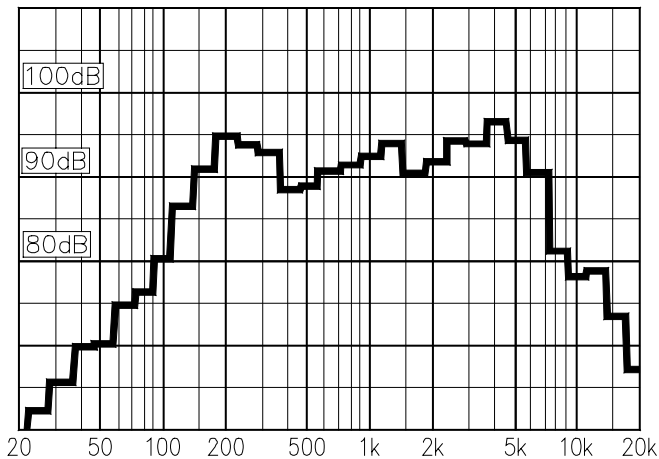

Material / Colour	ABS / RAL9010
Mounting	3 hooks, screws and nail
Termination	Spring clamps
Weight	0,7 kg
IP-rating	
Max. / min. amb. temp	90°C / -20°C
Standard version	100 V transformer
Rated / max. power	6 W / 6 W
SPL 1W/1m	90 dB
SPL rated power	97 dB
Effective freq. range	130 – 15000 Hz
Dispersion (-6dB) 1kHz / 4kHz	150° / 50°
Directivity factor, Q	

Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- Install outer ring into the hole by pushing down 3 clips. Secure the ring with the 3 screws Use nail to prevent the ring from turning. Connect cable to terminal. Screw the loudspeaker grill clockwise into fixed position.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Take care when loudspeaker is energized (100 V).
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colors, impedances and power ratings.

