


Transformer:
 Combined
 50 / 100 Volt line
 5(White) : 6(Green) 50V
 5(White) : 8(Red) 100V

Secondary nominal
 tappings:
 1 : 4 6,0W
 1 : 3 3,0W
 2 : 4 2,0W
 1 : 2 1,5W
 3 : 4 0,9 W
 2 : 3 0,5 W

Rec. ceiling hole: \varnothing 139 - 142 mm

1W/1m Pink Noise 1/3 octave bands

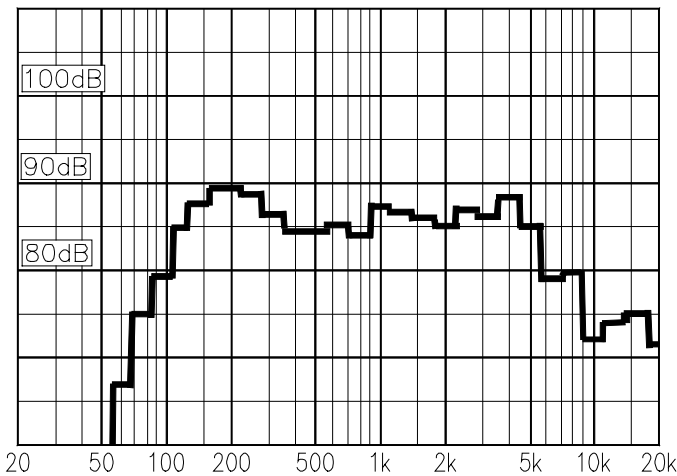

Material / Colour Aluminium / RAL9010
 Mounting Springs
 Termination Spring clamps
 Weight 1,1 kg
 IP-rating 42
 Max. / min. amb. temp 90°C / -20°C
 Standard version 50 / 100 V transformer
 Rated / max. power 6 W
 SPL 1W/1m 90 dB
 SPL rated power 97 dB
 Effective freq. range 180 – 9000 Hz
 Dispersion (-6dB) 1kHz / 4kHz 170° / 60°
 Directivity factor, Q.....

Installation, Operation and Maintenance Procedures

- Lead cable through cable inlet in to box and connect to terminal.
- Install box by 1 screw to loudspeaker and mount the complete loudspeaker by bending back 2 springs.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

