


Rec. ceiling hole: \varnothing 139 - 142 mm

Transformer:
 Combined
 50 / 100 Volt line
 5(White) : 6(Green) 50V
 5(White) : 8(Red) 100V

Secondary nominal
 tappings:

1 : 4	6,0W
1 : 3	3,0W
2 : 4	2,0W
1 : 2	1,5W
3 : 4	0,9 W
2 : 3	0,5 W

1W/1m Pink Noise 1/3 octave bands

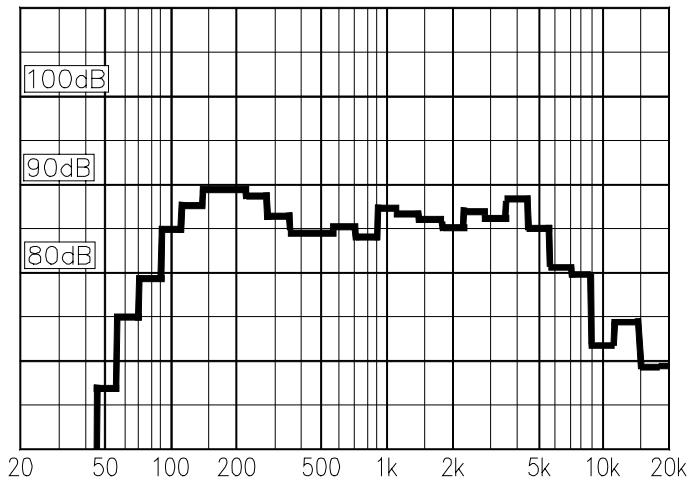

Material / Colour.....	Aluminium / RAL9010
Mounting	Springs
Termination	Spring clamps
Weight	1,1 kg
IP-rating	
Max. / min. amb. temp	90°C / -20°C
Standard version	50 / 100 V transformer
Rated / max. power	6 W
SPL 1W/1m.....	88 dB
SPL rated power.....	95 dB
Effective freq. range	70 – 9000 Hz
Dispersion (-6dB) 1kHz / 4kHz.....	170° / 60°
Directivity factor, Q.....	

Installation, Operation and Maintenance Procedures

- Connect to terminal. Install loudspeaker grill by bending back 2 springs.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- BK-560CR(T) is designed for clean room applications.
- Take care when loudspeaker is energized (100 V).
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

