


Transformer:  
100 Volt line

Primary nominal  
tappings:

1 : 2	15 W
2 : 3	7,5 W
3 : 4	4,0 W
1 : 3	2,7 W
2 : 4	1,3 W
1 : 4	0,8 W

1 = Red, 2 = Yellow  
3 = Green, 4 = Blue

1W/1m Pink Noise 1/3 octave bands:

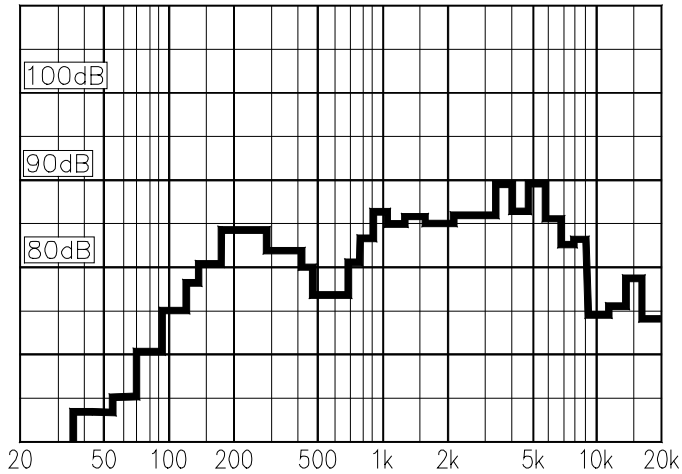

Material / Colour ..... Aluminium / RAL9010 or anodized  
Mounting.....Bracket  
Termination.....Cable, 1m  
Weight..... 2,4 kg  
IP-rating .....  
Max. / min. amb. temp..... 90°C / -40 °C  
Standard version..... 100 V transformer  
Rated / max. power ..... 15 W / 15 W  
SPL 1W/1m ..... 85 dB  
SPL rated power ..... 96 dB  
Effective freq. range..... 125 – 9000 Hz  
Dispersion (-6dB) 1kHz / 4kHz ..... 170° / 55°  
Directivity factor, Q .....

## Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- CAR-15CR is designed for clean room applications.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

