


Transformer:
100 Volt line

Primary nominal
tappings:
1 : 2 6,0 W
1 : 3 3,0 W
1 : 4 1,5 W

1 = Red, 2 = Yellow
3 = Green, 4 = Blue

1W/1m Pink Noise 1/3 octave bands

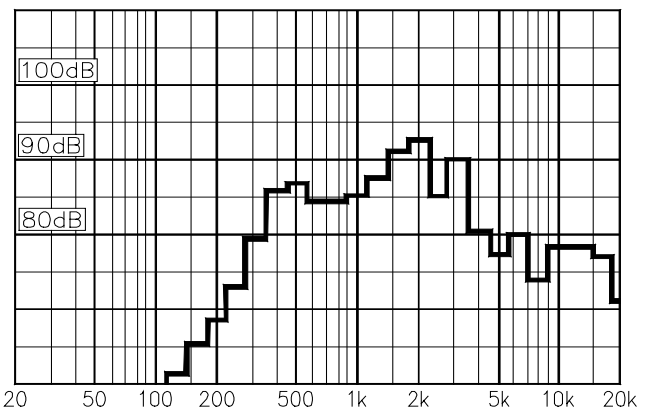

Material / Colour..... ABS / RAL 9010
 Mounting 4 screws or bracket
 Termination Cable, 1 m
 Weight 2,2 kg
 IP-rating 68
 Max. / min. amb. temp 90°C / -20°C
 Standard version 100 V transformer
 Rated / max. power 6 W / 30 W
 SPL 1W/1m.....85 dB
 SPL rated power93 dB
 Effective freq. range 280 – 18000 Hz
 Dispersion (-6dB) 1kHz / 4kHz..... 180° / 130°
 Directivity factor, Q.....

Installation, Operation and Maintenance Procedures

- Use 4 screws for mounting on wall, alternative flush mounting.
- When mounting with bracket, use the slit on each side to connect the bracket to the loudspeaker.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not install this loudspeaker under water when operated with 100V line.
- CR-6 (T) is designed for clean room applications.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

