


Transformer:
100 Volt line

Primary nominal
tappings:

1 : 2	6,0 W
2 : 3	3,0 W
3 : 4	1,5 W
1 : 3	1,0 W
2 : 4	0,5 W
1 : 4	0,3 W

1 = Red, 2 = Yellow
3 = Green, 4 = Blue

1W/1m Pink Noise 1/3 octave bands

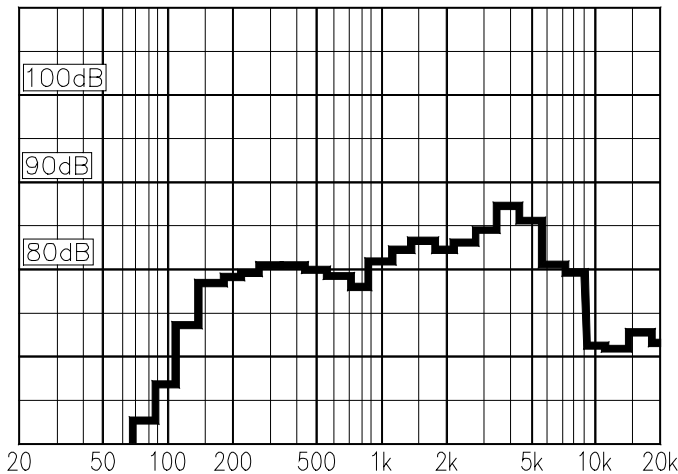

Material / Colour..... Aluminium / RAL9010 or anodized
Mounting Foot bracket
Termination Cable, 1m
Weight 3,0 kg
IP-rating
Max. / min. amb. temp 90°C / -40°C
Standard version 100 V transformer
Rated / max. power 6 W / 10 W
SPL 1W/1m 85 dB
SPL rated power 93 dB
Effective freq. range 150 –9000 Hz
Dispersion (-6dB) 1kHz / 4kHz 150° / 60°
Directivity factor, Q.....

Installation, Operation and Maintenance Procedures

- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- CAR-6 CR is designed for clean room applications.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

