


50/100 Volt Combined Transformer:

Primary connections:  
 5 : 6 50 Volt line  
 5 : 8 100 Volt line

Secondary nominal tapings:

1 : 4 10,0 W  
 1 : 3 5,0 W  
 2 : 4 3,5 W  
 1 : 2 2,5 W  
 3 : 4 1,5 W  
 2 : 3 0,8 W

1W/1m Pink Noise 1/3 octave bands

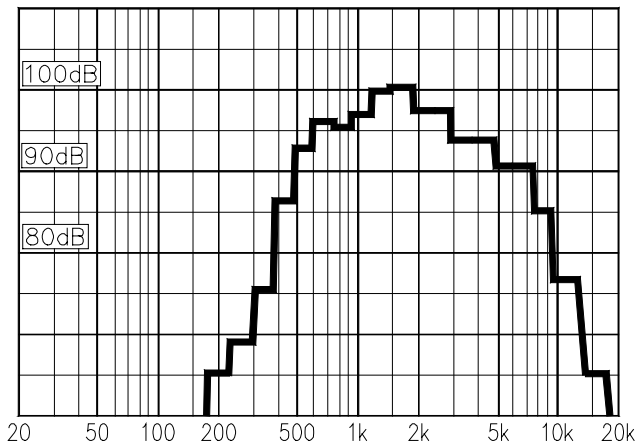

Material / Colour..... ABS / RAL 7035  
 Mounting ..... Bracket  
 Termination ..... Internal screw connections  
 Weight ..... 1,3 kg  
 IP-rating ..... 56  
 Max. / min. amb. temp ..... 90 °C / -50 °C  
 Standard version ..... 50 V / 100 V transformer  
 Rated / max. power ..... 10 W / 15 W  
 SPL 1W/1m..... 106 dB  
 SPL rated power ..... 116 dB  
 Effective freq. range ..... 410 – 8000 Hz  
 Dispersion (-6dB) 1kHz / 4kHz ..... 150° / 45°  
 Directivity factor, Q (2kHz) ..... 7,4

### Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- To change the position of the loudspeaker please adjust the bracket (by loosening / tightening the screws) as required.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- Fasten lid with a torque of 1 - 2 Nm.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colors, impedances and power ratings.

