


Transformer:
100 Volt line

Primary nominal
tappings:
1 : 2 6,0 W
2 : 3 3,0 W
3 : 4 1,5 W
1 : 3 1,0 W
2 : 4 0,6 W
1 : 4 0,4 W

1 = Red, 2 = Yellow
3 = Green, 4 = Blue

1W/1m Pink Noise 1/3 octave bands

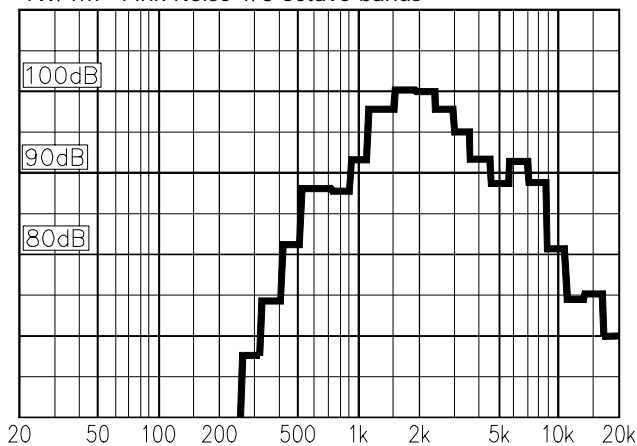

Material / Colour.....ABS, Polyamide / RAL 7035
 Mounting.....Bracket
 Termination.....Cable 0,5m
 Weight.....0,8 kg
 IP-rating.....67
 Max. / min. amb. temp.....90 °C / -40 °C
 Standard version.....100 V transformer
 Rated / max. power.....6 W / 15 W
 SPL 1W/1m.....100 dB
 SPL rated power.....107 dB
 Effective freq. range.....500 – 7500 Hz
 Dispersion (-6dB) 1kHz / 4kHz.....170° / 70°
 Directivity factor, Q (2kHz).....4,3

Installation, Operation and Maintenance Procedures

- Remove lid to connect to terminal.
- To change the position of the loudspeaker please adjust the bracket (by loosening / tightening the screws) as required.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Fasten lid with a torque of 1 - 2 Nm.
- HP-6C without cable. HP-6CT comes with 0,5m cable.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colors, impedances and power ratings.

