


Transformer:
100 Volt line
(50 Volt optional)

Primary nominal
tappings:

1 : 2	6,0 W
2 : 3	3,0 W
3 : 4	1,5 W
1 : 3	1,0 W
2 : 4	0,6 W
1 : 4	0,4 W

1 = Red, 2 = Yellow
3 = Green, 4 = Blue

1W/1m Pink Noise 1/3 octave bands

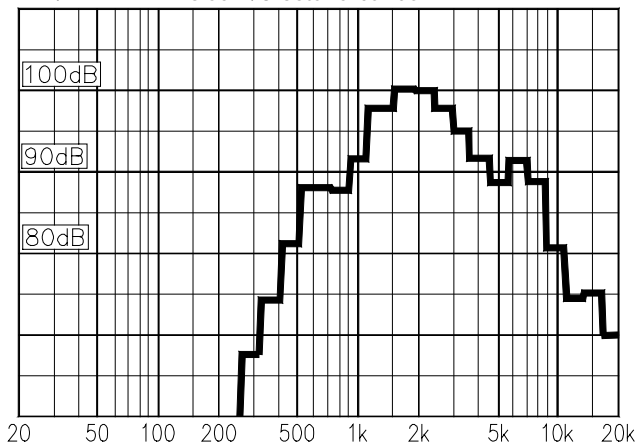

Material / Colour.....ABS, Polyamide / RAL 7035
Mounting Insertion
Termination Cable 0,5m
Weight 0,8 kg
IP-rating 67
Max. / min. amb. temp 90 °C / -40 °C
Standard version 100 V transformer
Rated / max. power 6 W / 15 W
SPL 1W/1m..... 100 dB
SPL rated power 107 dB
Effective freq. range 500 – 7500 Hz
Dispersion (-6dB) 1kHz / 4kHz 170° / 70°
Directivity factor, Q (2kHz) 4,3

Installation, Operation and Maintenance Procedures

- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Fasten lid with a torque of 1 - 2 Nm.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

