


Transformer:
100 Volt line

Primary nominal
tappings:
1 : 2 4,0 W
2 : 3 2,0 W
3 : 4 1,0 W
1 : 3 0,7 W
2 : 4 0,4 W
1 : 4 0,3 W

1 = Red, 2 = Yellow
3 = Green, 4 = Blue

1W/1m Pink Noise 1/3 octave bands

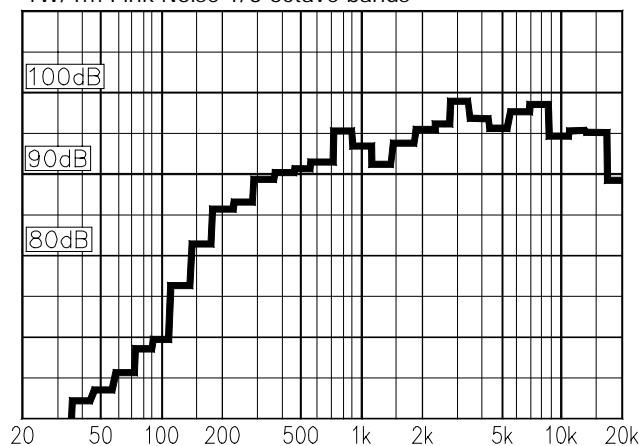

Material / Colour..... Aluminium / RAL9010 or Anodized
Mounting Foot bracket
Termination Cable, 1m
Weight 1,5 kg
IP-rating.....
Max. / min. amb. temp 90°C / -40°C
Standard version 100 V transformer
Rated / max. power 4 W / 6 W
SPL 1W/1m..... 92 dB
SPL rated power..... 98 dB
Effective freq. range 180 – 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz..... 360° / 50°
Directivity factor, Q.....

Installation, Operation and Maintenance Procedures

- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

