


Transformer: Combined
 50 / 100 Volt line
 5(White) : 6(Green) 50V
 5(White) : 8(Red) 100V

Secondary nominal
 tapings:

1 : 4	6,0 W
1 : 3	3,0 W
2 : 4	2,0 W
1 : 2	1,5 W
3 : 4	0,9 W
2 : 3	0,5 W

1W/1m Pink Noise 1/3 octave bands

Rec. ceiling hole: \varnothing 132 mm

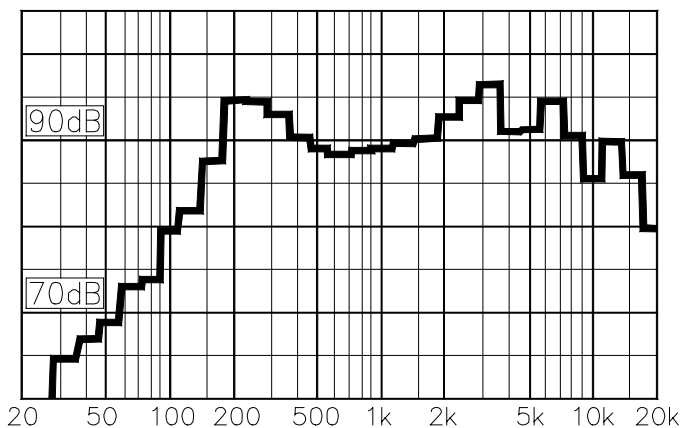

Material / Colour Aluminium / RAL9010
 Mounting 2 screws
 Termination Spring clamps
 Weight 0,9 kg
 IP-rating
 Max. / min. amb. temp 90°C / -20°C
 Standard version 50 / 100 V transformer
 Rated / max. power 6 W / 15 W
 SPL 1W/1m 90 dB
 SPL rated power 97 dB
 Effective freq. range 130 – 20000 Hz
 Dispersion (-6dB) 1kHz / 4kHz 170° / 60°
 Directivity factor, Q.....

Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- Connect to terminal. Install loudspeaker to wall / ceiling by means of 2 screws. Screw loudspeaker grill into fixed position.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Take care when loudspeaker is energized (100 V).
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

